## FUNCTIONAL \_ FEATURES 1











Super Wide 140 mm Radial Rear Tyre



LED Flashers

(\*Standard on R15M)

Side Stand With

Engine Cut-Off Switch



Top Cap Engraved With R15M Logo



DESIGN FEATURES

R15M



Aluminium Swingarm



Grey Color Muffler Guard

## **COLOR VARIANTS**

Authorised Dealer

# SPECIFICATIONS Engine











### Seat height Wheelbase

1325 mm Kerb weight (with oil and a full fuel tank)

58,0 x 58,7 mm

Wet, multiple-disc Electric starter

13.5kW(18.4PS)/10000r/min

Constant mesh, 6-speed

Dimensions

Fuel tank capacity

Maximum horse power

Starting system type

### Other Information

	12 V, 4 Ah Bi-functional LED (Class D)	Clock	Digital, auto adjust with smartphone connectivity
ght	LED	Riding Modes	Track Mode / Street Mode
light	LED	Dual horn	Equipped
eter	Digital	Y-Connect (Smartphone	Equipped
er	Digital	Bluetooth Connectivity)	
r	Digital	Side stand engine cut-off switch	Equipped
ig light	Equipped	Traction control system	Equipped
ator	Equipped	Quick shifter	Equipped*
ter indicator	Equipped	(up-shift)	*Available as an accessory for Dark Knight & Metallic Red
umption indicator	Equipped	Color TFT Meter	Fauinned**



	Bi-functional LED (Class D)		smartphone connectivity
	LED	Riding Modes	Track Mode / Street Mode
	LED	Dual horn	Equipped
D	Digital	Y-Connect (Smartphone	Equipped
Digital		Bluetooth Connectivity)	
	Digital	Side stand engine cut-off switch	Equipped
t	Equipped	Traction control system	Equipped
	Equipped	Quick shifter	Equipped*  *Available as an accessory for Dark Knight & Metallic Red
icator	Equipped	(up-shift)	
n indicator	Equipped	Color TFT Meter	Equipped**  **Standard only on R15M
dicator	Equipped		

Yamaha Motor India Sales Pvt. Ltd., AKDR Tower-5th Floor, Door No. 3/381, Rajiv Gandhi Salai (OMR) Mettukuppam, Chennai - 600097. Phone: 044-3814 7000. Toll Free No.: 1800 420 1600 Email: info@yamaha-motor-india.com www.yamaha-motor-india.com









# 155cc LC4V SOHC FI ENGINE

## WITH VVA

The liquid cooled single overhead camshaft fuel injected engine churns out a maximum horse power of 13.5kW(18.4PS)/10000r/min and maximum torque of 14.2N• m(1.4kgf • m)/7500r/min.









An A&S (assist and slipper) clutch is adopted to reduce the weight of the clutch pull and provide low-stress shifting during deceleration. The A&S helps to reduce fatigue for the rider. This also prevents excessive engine oraking, thus reducing its effects on chassis behavior. The A&S clutch makes for smooth, enjoyable downshifts.



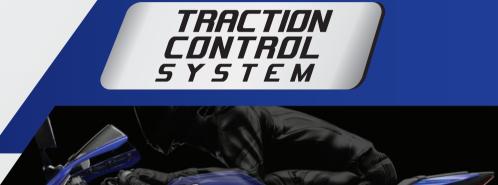

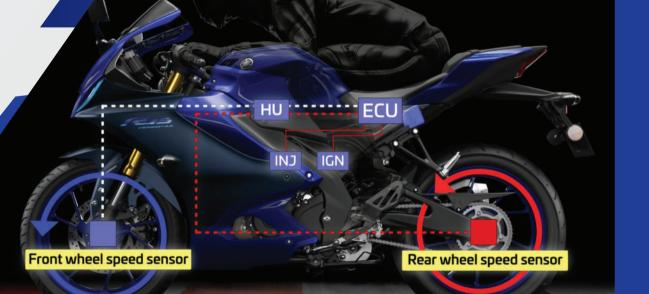

The R15M & R15 V4.0 comes with a Traction Control System. This is a dedicated electronic system that has the remarkable ability of reducing the chances of a wheelspin (slippage due to loss of traction).







ven at Low rpm. There re two intake valve cams: one for low to mid-range rpm and another for high rpm. They switch between each other at the 7,400 rpm mark to ensure good power and torque is present throughout the

entire rev range.



SMS & EMAIL

CALL ALERT\_

PHONE BATTERY
LEVEL STATUS

App APP CONNECTIVITY STATUS

Now the R15M has a full colour TFT meter inspired by the R1 . Stay informed of all that happens with the advanced instrument cluster screen.

### WITH TRACK MODE & STREET MODE

The two riding modes (Track Mode & Street Mode) display important information on the instrument cluster screen.





Stay connected even on the move. Y-Connect is Yamaha's latest innovation that lets you link your smartphone directly to your Yamaha motorcycle.

STREET MODE

Coolant Temperature

Average Speed

Battery Power

Latest Lap Time

TRACTION CONTROL SYSTEM INDICATOR

QUICK SHIFTER INDICATOR\*



