

LEAD THE GAME



INTRODUCING

GLAMOUR XTEC

WITH RIDE SMART FEATURES



SPECIFICATIONS

ENGINE	
Engine Type	Air cooled 4 stroke
Bore & Stroke	52.4 mm x 57.8 mm
Displacement (cm ³)	124.7
Compression Ratio	9.9:1
Max Power (BHP/Revolution Per Minute)	10.7 @ 7500
Max Torque (Nm/Revolution Per Minute)	10.4 @ 6000
Fuel System	Fuel Injection
TRANSMISSION & CHASSIS	
Frame Type	Diamond
Transmission Type	5 Speed
Clutch Type	Wet Multiplate
SUSPENSION	
Front Suspension Type	Dia. 30 Telescopic
Rear Suspension Type	5 step Adjustable Hydraulic Shock Absorbers
BRAKES	
Front Brake Type (mm)	Disc - dia 240
	Drum - dia 130
Rear Brake Type (mm)	Drum - dia 130
WHEELS & TYRES	
Wheel Type	Alloy
Front Tyre	80/100-18 (Tubeless)
Rear Tyre	100/80-18 (Tubeless)
ELECTRICALS	
Battery (V-Ah)	MF 12V , 4Ah (ETZ 5)
Starting System	Self (with i3s) & Kick
DIMENSIONS	
Overall Length (mm)	2051
Overall Width (mm)	Drum-720 / Disc-743
Overall Height (mm)	1074
Wheelbase (mm)	1273
Seat Height (mm)	798
Ground Clearance (mm)	180
Trail (mm)	92
Fuel Tank Capacity (Litre)	10
Kerb Weight (kg)	Self Drum Cast-122 Self Disc Cast-123


Available in 'Drum' & 'Disc' Variant.



**NAVIGATION
ASSIST**



**SIDE STAND
ENGINE CUT-OFF**

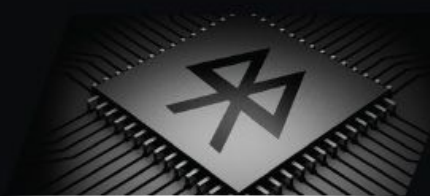

**BLUETOOTH
CONNECT**



**BUILT-IN
MOBILE CHARGER**

**ATTRACTIVE
COLOURS**



MATTE AXIS GREY

GLAZE BLACK

Regd. Office: Hero MotoCorp Limited, The Grand Plaza, Plot No.2, Nelson Mandela Road, Vasant Kunj - Phase -II, New Delhi - 110070, India. CIN: L35911DL1984PLC017354. Phone No.: 011 - 46044100. For further information, contact nearest Hero MotoCorp authorised outlet or call our toll free no.: 1800 - 266 - 0018 or visit us on www.heromotocorp.com. Accessories and features shown may not be part of standard fitment. Always wear a helmet while riding a two wheeler.



Scan the QR Code To Know More



*Conditions apply.